

BEST AVAILABLE COPY

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

DOMENICO G. PORCINO

GB000026

Filed: CONCURRENTLY

Title: METHOD OF, AND RECEIVER FOR, DETECTING THE PRESENCE OF DATA

Commissioner for Patents, Washington, D.C. 20231

AUTHORIZATION PURSUANT TO 37 CFR §1.136(a)(3)
AND TO CHARGE DEPOSIT ACCOUNT


Sir:

The Commissioner is hereby requested and authorized to treat any concurrent or future reply in this application requiring a petition for extension of time for its timely submission, as incorporating a petition for extension of time for the appropriate length of time.

Please charge any additional fees which may now or in the future be required in this application, including extension of time fees, but excluding the issue fee unless explicitly requested to do so, and credit any overpayment, to Deposit Account No. 14-1270.

Respectfully submitted,

By


Dicran Halajian, Reg. No. 39,703

Attorney

(914) 333-9607



This Page Blank (uspto)



PHGB 000026

USA



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

JC843 U.S. P. #2
09/801600

#2

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

Signed

Dated

13 November 2000

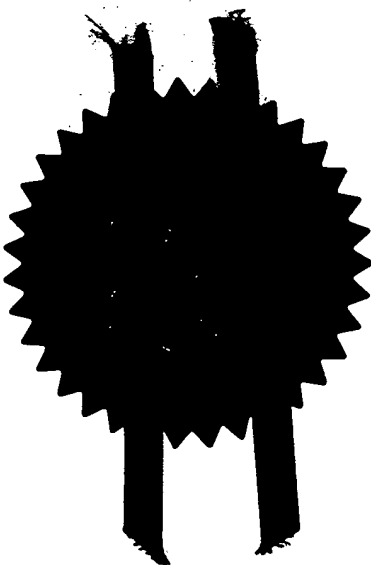


An Executive Agency of the Department of Trade and Industry

This Page Blank (uspto)

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

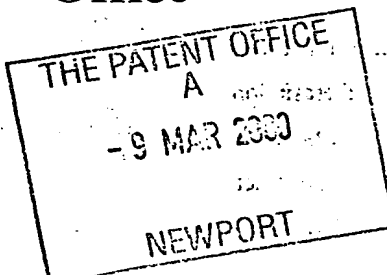

09MAR00 E519685-1 D02879
F01/7700 0.00-0005591.3

The Patent Office

Cardiff Road
Newport
Gwent NP23 5PH

1. Your reference	PHGB 000026		
2. Patent application number (The Patent Office will fill in this part)	0005591.3		
3. Full name, address and postcode of the or of each applicant (underline all surnames)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS		
Patents ADP Number (if you know it)			
If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4. Title of the invention	METHOD OF, AND RECEIVER FOR, DETECTING THE PRESENCE OF DATA		
5. Name of your agent (if you have one)	COLIN JAMES MOODY		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA		
Patents ADP number (if you know it)	7133051001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if:	YES		
a) any applicant named in part 3 is not an inventor, or			
b) there is an inventor who is not named as an applicant, or			
c) any named applicant is a corporate body.			
See note (d))			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document.

Continuation sheets of this form

Description

7x2

Claims(s)

2x2

Abstract

1x2

Drawings

2x2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and
search (*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents
(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

12. Name and daytime telephone number of
person to contact in the United Kingdom

01293 81 5278

C J MOODY

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DESCRIPTION

**METHOD OF, AND RECEIVER FOR, DETECTING THE
PRESENCE OF DATA**

5

The present invention relates to a method of, and receiver for, detecting the presence of a data signal. Such a receiver is typically a receiver section of a telemetry module used for applications such as automatic water metering.

10

Telemetry modules are installed in equipment which may be continuously in use for many years without being serviced. In the case of battery powered telemetry modules it is desirable for them to operate for up to 10 years between battery replacements. To be able to achieve such long service lives the telemetry modules operate in accordance with a protocol facilitating current saving whilst giving an adequate response time. Protocols achieving these objectives are well known in various technical fields such as digital paging in which the CCIR Radiopaging Code No. 1, alternatively known as POCSAG, has been in use for nearly 20 years. The general approach followed is that the radio unit "sleeps" for long periods of time but wakes up periodically to check if there are any data signals being transmitted on its channel. The wake-up period may be preset independently of whether or not signals are present. In a refinement of this type of battery economy protocol, when the radio unit has been woken-up, it checks for the presence of data before energising the entire receiver and if none is detected within a period of time which is shorter than the preset period, it powers down prematurely.

20

25

If the radio unit is unreliable in detecting data then firstly there is a probability of a false alarm ($P(\text{false alarm})$ or $P(\text{fa})$ for short) which is defined as the probability that a signal is "detected" by a data presence detector, even when only noise is present, and secondly there is a probability of false dismissal ($P(\text{false dismissal})$ or $P(\text{fd})$ in short) which is defined as the probability that the data presence detector rejects a good signal and takes it for noise. $P(\text{fd})$ is a more critical parameter because every single false

30

dismissal of data will cause a complete loss of a packet. Typical system requirements area: $P(fa) \leq 1\%$ and $P(fd) \leq 0.1\%$

5 An object of the present invention is to optimise the detection of the data presence for the shortest possible time that guarantees the minimum reliability required whilst minimising the energy requirements.

According to a first aspect of the present invention there is provided a method of detecting the presence of digitally modulated data signals, the method including differentially decoding the digitally modulated signals into
10 oversampled complex signals comprising n samples per bit, forming a running sum of successive groups of m samples, where m is less than n , deriving an absolute value for the successive running sums, weighting the absolute value and determining the presence of data by comparing the weighted absolute value with a threshold level.

15 According to a second aspect of the present invention there is provided a receiver comprising means for receiving a digitally modulated signal, means for forming the digitally modulated signal into an oversampled, differentially decoded complex signal comprising a stream of n samples per bit, means for forming a running sum of successive groups of m samples, where m is less
20 than n , means for deriving an absolute value for successive running sums, weighting means for weighting the respective absolute values, and a comparator for comparing the weighted absolute value with a threshold level and providing an output indicative of the presence of data in the received signals.

25 The present invention is based on a mechanism which comprises adding up the absolute value of the incoming signal, sample by sample, until a fixed threshold is reached or a time-out instant has passed. In the first case one can be sure that a signal is present and in the second case one can be certain that a signal is not present. In a refinement of the basic mechanism
30 some account is taken of the previous samples' history and their value when combined with others. As a consequence of this single samples are not considered but rather groups of samples collected together.

In the case of the data signals being 2-FSK signals, the running sum is made of the differentially decoded samples contained in the imaginary constellation. An advantage of choosing the imaginary constellation is that a faster result is obtained compared to a known technique in the sum of the squares of I and Q signals is compared with a threshold value.

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a receiver made in accordance with the present invention for use with a 2-FSK signal

Figure 2 illustrates a constellation of 2-FSK demodulated data, and

Figure 3 illustrates a statistical distribution of a counter value in the presence of signal and noise together with an indication of the weights W_i assigned to each group or window; the abscissa represents the counter value and the ordinate the number of occurrences.

The receiver shown in Figure 1 may be an independent receiver or the receiver section of a transceiver embodied in a telemetry module. For convenience both arrangements will be described as a receiver.

The receiver operates in accordance with a battery economising protocol whereby it is periodically woken-up from a sleep mode in which only those parts of the receiver essential to maintaining the receiver functional in its sleep state are energised.

An antenna 10 is coupled to a signal splitter 12 which supplies an input signal to first inputs 14, 15 of mixers 16, 17. A local oscillator 18 is coupled to a second input 20 of the mixer 16 and, by way of a quadrature phase shifter 22, to a second input 21 of the mixer 17. The frequency of the local oscillator 18 is selected to translate the signal received at the antenna 10 down to either a zero IF or low IF. The output from the mixer 16 is designated the in-phase signal $I(t)$ and the output from the mixer 17 is designated the quadrature phase signal $Q(t)$.

The in-phase and quadrature phase signals $I(t)$ and $Q(t)$ are respectively filtered and digitised in low pass filters 24, 25 and analogue to digital converters (ADC) 26, 27.

The ADCs 26, 27 oversample the signals $I(t)$ and $Q(t)$ and the samples
5 are applied to a differential decoder 28. For example if the data rate is 150 bits/s and the sampling frequency is 76.8kHz, the oversampling rate is 512 samples per bit. The differential decoder 28 is of a known design and comprises a complex signal combiner 30 having a first output coupled by way of a delay stage 31 and a complex conjugate stage 32 to a first input of a
10 multiplier 34 and a second output coupled directly to a second input of the multiplier 34. An output of the multiplier 34 is applied to a complex real and imaginary stage 36 which supplies a real output Re and an imaginary output Im both at the oversampled bit rate.

Referring to Figure 2 for a moment, the main aim of the data presence
15 indicator circuit DPI (Figure 1) is to distinguish signal from noise. In order to make the DPI circuit more efficient in the case of 2-FSK modulated transmissions the information available on the constellation expected for the demodulated digital signal is used. As shown in Figure 2 the constellation of the decoded signals lies entirely on the imaginary branch Im . Therefore
20 integrating the data registered on the real channel Re , which is similar to pure noise, is not beneficial insofar as 2-FSK is concerned. By neglecting the contribution from the real channel, the speed of the detection process is increased with respect to known methods. For multilevel modulation schemes it will be necessary to include the contribution from both the real (Re) and
25 imaginary (Im) outputs.

Referring back to Figure 1, the oversampled imaginary output Im is supplied to a data presence indicator circuit DPI. The samples are supplied to a running sum counter 38, the output of which is coupled to a normally open switch 40. A counter 42 counts 32 samples and on the 32nd count it produces
30 an output which is supplied firstly to a control input 44 of the switch 40 causing it to close transferring the running sum count to an absolute value stage 48 and secondly to a reset input 46 of the counter 38 to reset the count to zero.

The absolute value count X_i from the stage 48 is supplied to a comparator 50 and to a multiplying stage 52 in which it is multiplied by a weighting value W_i .

Four threshold values $tr1$ to $tr4$ are supplied to respective inputs of the comparator 50 which has five outputs respectively for the conditions:

- 5 $X_i > tr1$; $tr2 < X_i < tr1$; $tr3 < X_i < tr2$; $tr4 < X_i < tr3$ and $X_i < tr4$. A weighting value selecting stage 54 has inputs coupled to each of the five outputs of the comparator 50 and selects a weighting value W_i in response to which one of the five outputs is active.

- 10 The product $S = X_i * W_i$ is supplied to another comparator 56 in which it is compared to a threshold value supplied by a threshold stage 58. If the threshold is exceeded then an output 60 of the comparator 56 will carry a data present signal in which case the receiver will stay awake. If the threshold is not exceeded, the data presence indicator DPI will time-out and the receiver reverts to a sleep mode before the expiry of its wake-up period.

- 15 Referring to Figure 3, the drawing shows histograms of values of the running sum counts from the counter 28 after the counting of 32 samples. The counts will vary between 0 and 32. The distribution of noise counts, that is, counts in the presence of noise only on the air, is shown by the short broken lines and the solid black lines show the distribution of the signal counts.

- 20 By knowing in advance that the expected value of the counter 38 in the case of a signal will be very different (and generally higher) from the expected count in the case of noise. This information is used to advantage in weighting the results of different measurements according to the degree of confidence assigned to them.

- 25 As an example of a general case, the data is oversampled in a way that the typical data period will be n samples long and this data period is divided into groups or windows of m consecutive samples, with $m < n$. In the present example $n = 512$ samples per bit and $m = 32$ samples. In the embodiment shown in Figure 1, each window of m samples is considered independently from the preceding and succeeding windows, which allows a short history contribution. The value of the counter for each group of m samples will be
30 between 0 and m . This number is weighted according to the distribution of the

data in the histogram shown in Figure 3. In Figure 3 getting a value of correlation bigger than 15 out of 32 will give a high probability that this is due to signal and not noise. Therefore this information can be weighted higher than information coming from a counter value of 10. Thus the values of tr1 to tr4 in Figure 1 define various break points in the counter values and the weighting values W1 to W5 (Figure 3) are assigned to the various bands in dependence on the confidence chosen.

Other methods of weighting can be employed besides the method just described. As a general rule the weighting $W_i = f(\text{correlation values})$ where the function can be any suitable linear or non-linear function appropriately designed according to the knowledge of distribution of the counter values in predefined conditions such as noise only or different signal power levels.

The method of weighting need not require counter values to be compared with threshold values. If the distribution of counts is Gaussian then the weighting can be determined from:

$$W(x) = \frac{e^{-(x-m)^2 / 2\sigma^2}}{\sqrt{2\pi\sigma^2}}$$

where x is the absolute value counter value and

σ is the variance.

In another variant the weighting may be a square relationship, $W(x) = x^2$ where x is the absolute value counter value.

As a consequence of weighting the counter values the operation of the data presence indicator is faster compared to a known technique based on obtaining the sum of the squares of the quadrature components and comparing this with a threshold value and its reliability is high. Because this method is faster battery saving is enhanced considerably.

The data presence indicator DPI may optionally include a power level estimator 62.

The power level estimator 62, which is coupled to the output of the multiplying stage 52, can be implemented as a running average stage and the longer it is active, the higher the quality of the estimate obtained. For example

a 1dB resolution can be obtained by averaging over a period corresponding to 2 to 3 detection periods. The lower level estimator itself will be the output of a counter having a variable slope depending on the quality of the data. The faster the slope of the ramp, the higher is the signal power. Simple averaging
5 the counter values will give an accurate estimate of the input power.

Although the embodiment of the present invention has been described with reference to 2-FSK modulation, the teachings of the present invention can be applied to higher levels of modulation in which case both the real output Re and the imaginary output Im have to be used by the DPI.

10 In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be
15 apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of receivers having a data presence indicator stage and component parts therefor and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to
20 particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the
25 same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

CLAIMS

1. A method of detecting the presence of digitally modulated data signals, the method including differentially decoding the digitally modulated signals into oversampled complex signals comprising n samples per bit, forming a running sum of successive groups of m samples, where m is less than n , deriving an absolute value for the successive running sums, weighting the absolute value and determining the presence of data by comparing the weighted absolute value with a threshold level.
5
2. A method as claimed in claim 1, characterised in that the absolute value is weighted by comparing the absolute value with a plurality of threshold values of different magnitudes, the difference between threshold values of successive magnitudes comprising a window having a weighting value assigned to it, and in that the weighted absolute value is a product of the absolute value and a determined weighting value.
10
15
3. A method as claimed in claim 1 or 2, characterised by estimating the power level from the product of the absolute value and its associated weighting value.
20
4. A method as claimed in any one of claims 1 to 3, wherein the digitally modulated signals comprise 2-FSK signals, characterised in that a constellation containing differentially decoded imaginary values is used to form the running sum.
25
5. A receiver comprising means for receiving a digitally modulated signal, means for forming the digitally modulated signal into an oversampled, differentially decoded complex signal comprising a stream of n samples per bit, means for forming a running sum of successive groups of m samples, where m is less than n , means for deriving an absolute value for successive running sums, weighting means for weighting the respective absolute values,
30

and a comparator for comparing the weighted absolute value with a threshold level and providing an output indicative of the presence of data in the received signals.

5 6. A receiver as claimed in claim 5, characterised in that the weighting means comprises comparing means for comparing the derived absolute values with a plurality of threshold values and means for selecting a weighting value based on the result of the comparison, and in that multiplying means are provided for forming the weighted absolute value as a product of a
10 respective absolute value and its associated weighting value.

7. A receiver as claimed in claim 5 or 6, characterised by a power level estimator coupled to an output of the multiplying means.

15 8. A receiver as claimed in claim 5, 6 or 7, fabricated as an integrated circuit.

9. A telemetry module including a receiver as claimed in any one of claims 5 to 8.

20

10. A method of detecting the presence of digitally modulated signals, substantially as hereinbefore described with reference to the accompanying drawings.

25 11. A receiver constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

ABSTRACT

**METHOD OF, AND RECEIVER FOR, DETECTING THE PRESENCE
OF DATA**

5

A method of, and a receiver for, detecting the presence of digitally modulated data signals in which the receiver is periodically energised to detect the presence of the signals. The received signals/noise are converted using a quadrature frequency translation stage (16, 17, 18) into a complex signal which after differential decoding (28) contain n samples for each transmitted bit. A running sum of successive groups of m samples, where $m < n$, is obtained and an absolute value (X_i) of each group is derived. A weighting value (W_i) is selected by comparing each absolute value with predetermined statistics of expected values and the weighting value selected is multiplied by the associated absolute value to produce a product (S). The product is compared in a comparator (56) with a further threshold level (58) to derive an indication of the presence of data in the received signals. If the indication is negative the receiver is powered down to save power.

20 (Figure 1)

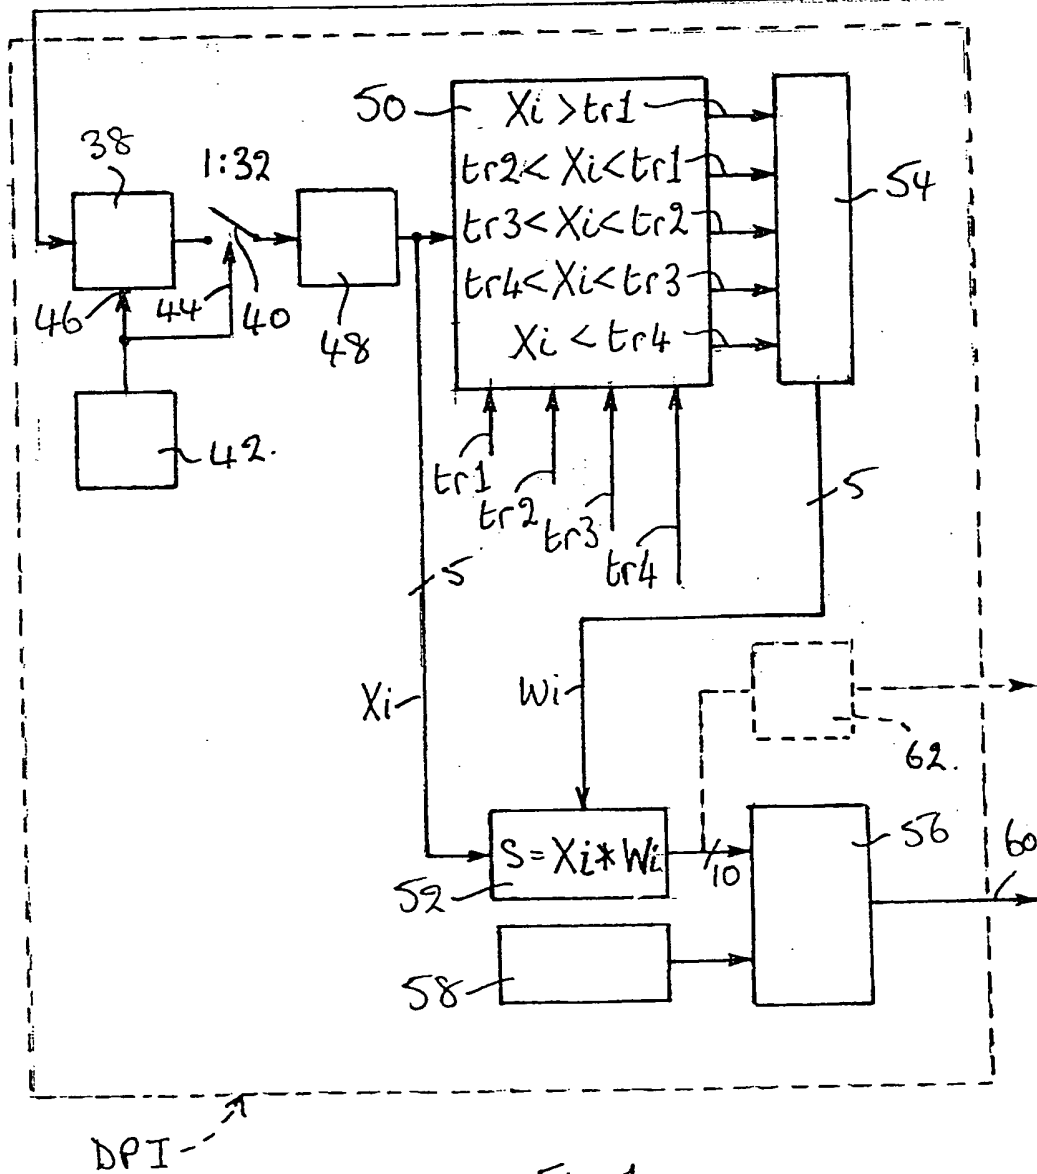
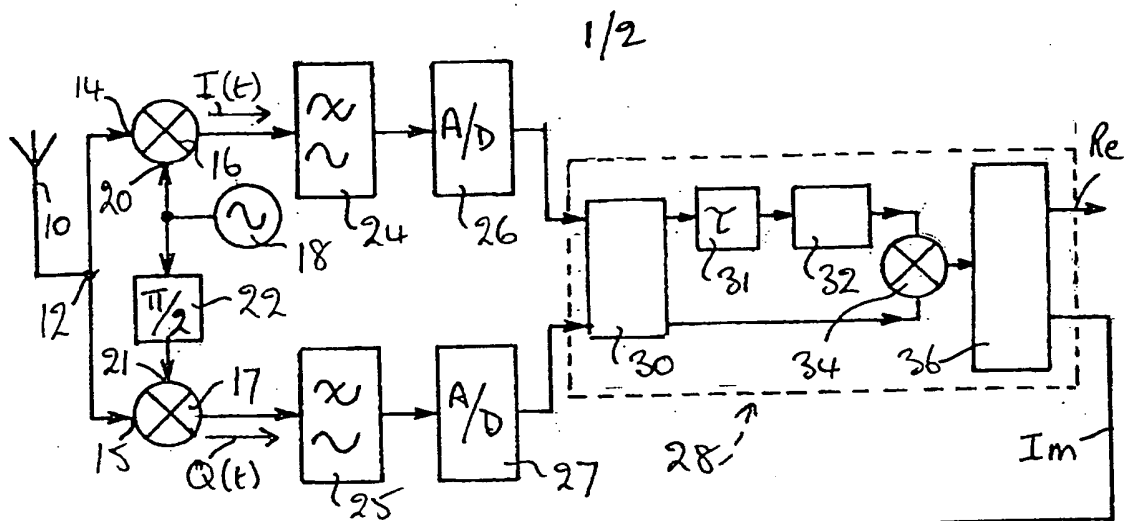


Fig. 1

This Page Blank (uspto)

2/2

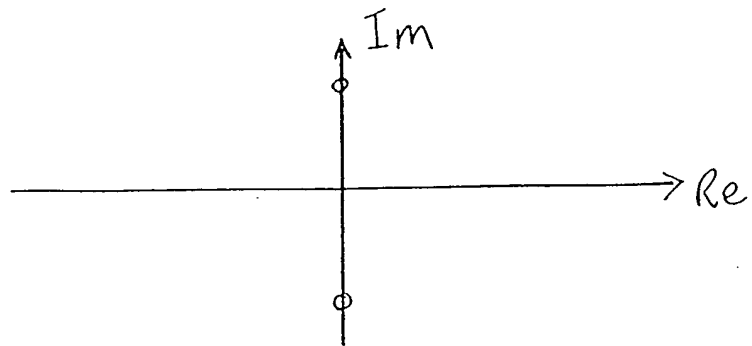


Fig. 2.

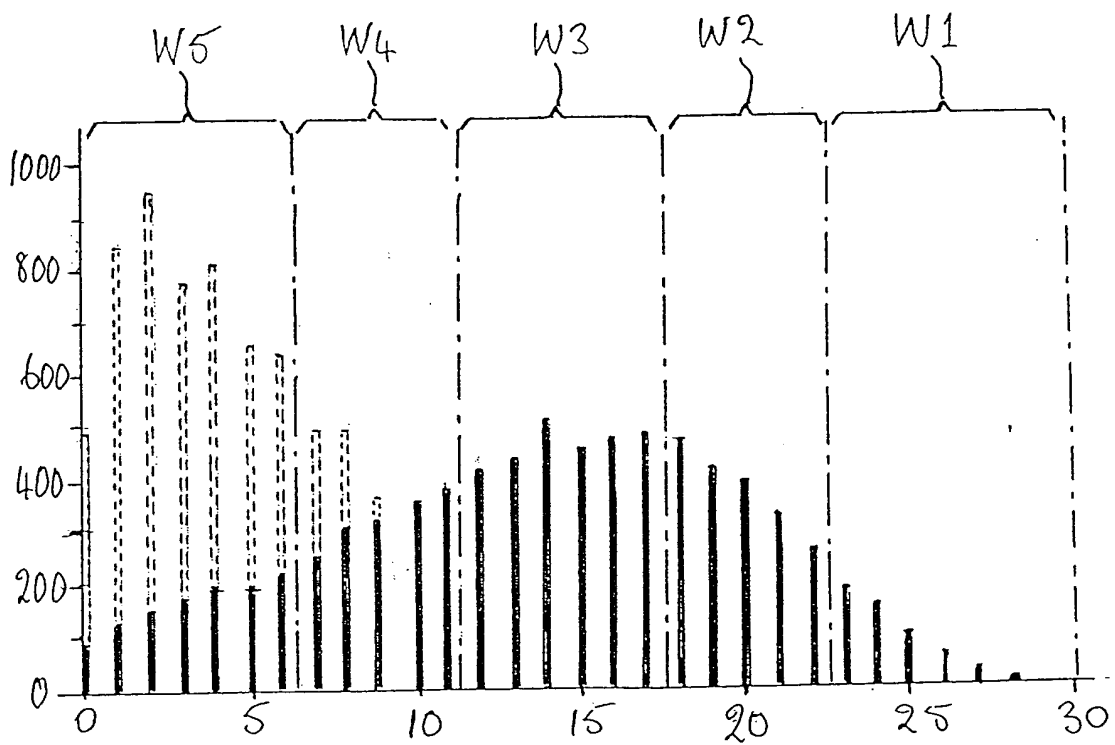


Fig. 3

This Page Blank (uspto)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)